


KNOTT AXSEN GEBREMST



Achse gebremst

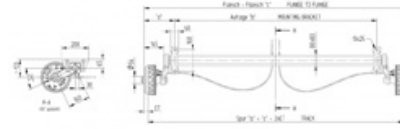

Abmessungen

- Weitere Achsen auf Anfrage lieferbar! -

Art.-Nr.	Artikelbezeichnung	Radanschluss	Achslast kg	Anlage in mm	Auflage in mm
292 9955	Achse VGB7-L	100 x 4 mm	750	1750 (c)	1300 (b)
293 0010	Achse VGB8-M	100 x 4 mm	850	1650 (c)	1200 (b)
177 2119	Achse VGB10-M	100 x 4 mm	1050	1450 (c)	1000 (b)
293 0011	Achse VGB10-M	112 x 5 mm	1050	1550 (c)	1100 (b)
293 0012	Achse VGB10-M	100 x 4 mm	1050	1750 (c)	1300 (b)
293 0013	Achse VGB10-M	112 x 5 mm	1050	1750 (c)	1300 (b)
959 4929	Achse VGB10-M	112 x 5 mm	1050	2050 (c)	1600 (b)
933 8570	Achse VGB10-M	112 x 5 mm	1050	2350 (c)	1900 (b)
255 7623	Achse VGB13-M	100 x 4 mm	1350	1450 (c)	1000 (b)
739 2762	Achse VGB13-M	100 x 4 mm	1350	1850 (c)	1400 (b)
293 0017	Achse VGB13-M	100 x 4 mm	1350	2050 (c)	1600 (b)
510 2389	Achse VGB13-M	112 x 5 mm	1350	1550 (c)	1100 (b)
758 2758	Achse VGB13-M	112 x 5 mm	1350	1650 (c)	1200 (b)
511 8685	Achse VGB13-M	112 x 5 mm	1350	1750 (c)	1300 (b)
633 6532	Achse VGB13-M	112 x 5 mm	1350	1950 (c)	1500 (b)
293 0015	Achse VGB13-M	112 x 5 mm	1350	2050 (c)	1600 (b)
292 9905	Achse VGB15-MV/M	112 x 5 mm	1500	1870 (c)	1400 (b)
293 0018	Achse VGB18-MV	112 x 5 mm	1800	2170 (c)	1700 (b)
293 0019	Achse VGB18-MV	112 x 5 mm	1800	2270 (c)	1800 (b)